
OsiSense™ XG

Radio Frequency Identification System

Catalog



Simply easy!



Fully open RFID

Make the most of the openness of the **OsiSense XG** RFID system. This product range gives you the freedom to choose the tags you wish, and automatically adapts to your network protocol.

This range has many advantages:

> Choice of tags

100% compatible with ISO standard tags (non-locked)

> Simplicity and speed

30% savings in installation and setup time

> Tested and approved

100% RoHS compliant; UL, CE, and FCC certified

Contents

Selection guide	page 6
Introduction, description	page 8
Specifications	page 18
Catalog numbers	page 20
Dimensions	page 24
Connections	page 26
Operating curves	page 28
Mounting distances	page 29
Product catalog number index	page 30



Choice of tags

Select from the **OsiSense XG** range of industrial tags or from the ISO standard tags (non-locked) available on the market.

> Worldwide compatibility

with 13.56 MHz standards (ISO 18000-3, ISO 15693, ISO 14443).



100% compatible

for simplifying selection


> Automatic integration into your architecture

The **OsiSense XG** RFID system simplifies access to tag data.

- Requires no specific programming
- Automatically adapts to the protocol and speed of the network (Ethernet/IP, Modbus TCP/IP, Modbus RTU, Uni-Telway, Profibus-DP).

100% compatible

for inclusion in architectures

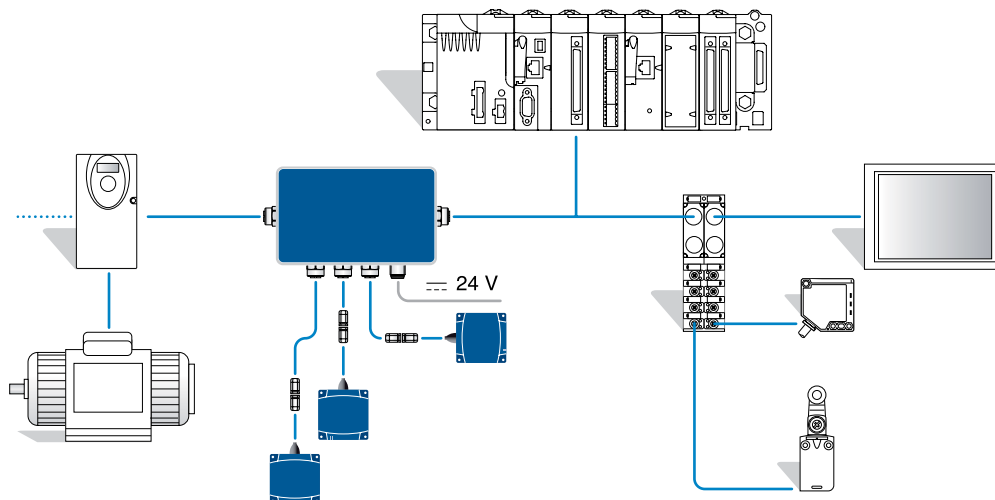

Simplicity and speed

Forget complex connections and configurations. With **OsiSense XG**, the RFID system is quick and easy to install and set up.

> Easy to install

The station self-adapts to the environment. It fits even in confined spaces, thanks to its compactness (40 x 40 x 15 mm), mounting accessories, and quick cabling.



> Quick to connect and set up

- Connect the station to the PLC, and it's fully operational. Everything you need is integrated into the product (antenna, RFID controller, and protocol).

- Simply present the configuration badge to set the network address of the station.

30%

savings in installation and setup time

- Use the handheld terminal (XGST2422) for direct access to data in the tags.



Tested and approved




Ideally suited to a variety of constraints and requirements, the **OsiSense XG** range has been comprehensively tested both in the laboratory and in the field to help ensure its reliability. The reduced consumption (< 60 mA per station) and the choice of materials for the **OsiSense XG** range make the products environmentally friendly.

100 % RoHs Compliant

Telemecanique Sensors brand is committed to reducing the environmental impact of its products

Selection guide

Material handling



Reading system

- 1 XGCS4901201
- 2 XGCS8901201
- 3 XGCS4901201 + XGFEC540
- 4 XGCS4901201 + XGFEC2525
- 5 XGST2422

RFID tags

- 6 XGHB411346
- 7 XGHB211345
- 8 XGHB221346
- 9 XGHB320345
- 10 XGHB90E340
- 11 XGHB444345
- 12 XGHB445345
- 13 XGHB320246
- 14 XGHB440245
- 15 XGHB440845
- 16 XGHB443245

	Trolley	Narrow conveyor or overhead line	Medium width conveyor	Wide conveyor	Operator
1		[Blue bar]			[Blue bar]
2		[Blue bar]			
3			[Blue bar]		
4	[Blue bar]			[Blue bar]	
5					
6		[Blue bar]			
7		[Blue bar]			
8		[Blue bar]			
9		[Blue bar]			
10	[Blue bar]		[Blue bar]	[Blue bar]	[Blue bar]
11					
12					
13					
14					
15					
16					



5








- 1 XGCS4901201
- 2 XGCS8901201
- 3 XGCS4901201 + XGFEC540
- 4 XGCS4901201 + XGFEC2525

Access control

Traceability

Flexible assembly



Service

Vehicle

Container

Tools

Simple

Complex



Overall size of dialog zone

Length x width (mm)

Distance (mm)

39 x 35	30-39	18	40	48	70	33	30	45	45	25	25
79 x 75	35-46	20	55	65	100	48	40	65	65	39	39
390 x 45	—	—	—	42	90	—	—	50	50	—	—
240 x 240	—	—	42	80	150	—	—	40	40	—	—

Memory capacity (bytes)

64	256	256	112	256	3408	13632	2000	2000	8192	32768
----	-----	-----	-----	-----	------	-------	------	------	------	-------

Memory type

EEPROM	EEPROM	EEPROM	EEPROM	EEPROM	EEPROM	EEPROM	FeRAM	FeRAM	FeRAM	FeRAM
--------	--------	--------	--------	--------	--------	--------	-------	-------	-------	-------



XGHB411346 XGHB211345 XGHB221346 XGHB320345 XGHB90E340 XGHB444345 XGHB445345 XGHB320246 XGHB440245 XGHB440845 XGHB443245

OsiSense XG

Radio Frequency Identification System

13.56 MHz

Operating principle

RFID is the abbreviation used for radio frequency identification systems. The frequencies range from 50 kHz to 2.5 GHz. The most widely used is 13.56 MHz.

The OsiSense XG RFID system offers functions such as object traceability, object tracking, and access control. Information is stored in an accessible memory bank using a simple radio frequency link. This memory is in the form of an electronic tag, which contains an antenna and an integrated circuit.

The tag stores information about the object that the tag is attached to. When the tag passes through a field generated by a smart antenna (reader), the tag detects the signal and exchanges the read or write data between its memory and the smart antenna.

The numerous applications include the following:

- Logistics, such as dispatch, receipt, and transit
- Tracking and sorting of baggage
- Traceability in the food processing industry
- Flexible assembly lines in the automotive sector
- Automatic tolls
- Access control

The OsiSense XG RFID system is also suited to difficult environmental conditions, such as humidity, temperature, mechanical shock, vibration, and dust.

OsiSense XG RFID

The OsiSense XG RFID system is open to the majority of ISO 18000-3, ISO 15693 and ISO 14443 electronic tags.

The system integrates Modbus™ RTU, Uni-Telway, Modbus TCP/IP, Profibus-DP, and Ethernet/IP protocols.

The range includes the following:

- Three models of 13.56 MHz compact smart antennas (read/write)
- Eleven models of 13.56 MHz electronic tags
- One handheld RFID terminal
- Three models of network connection boxes
- Two models of field expanders (accessories to adapt the shape of the dialog zone between the tag and the compact smart antenna)
- Connection and mounting accessories

Setup

The OsiSense XG compact smart antennas are simple to set up, thanks to the following features:

- Integrated RFID and network functions
- No programming
- Automatic detection of the RFID electronic tags (read or write)
- Automatic setting of the communication parameters (such as speed, format, parity, and protocol)
- Configuration of the network address (1–15) using the badge included with the smart antenna
- Read/write compatibility with the majority of 13.56 MHz tags on the market
- Low sensitivity to metal environments

Installation

The OsiSense XG smart antennas are compact and robust. They can easily be integrated into flexible manufacturing production lines in the following ways:

- Quick connection using an M12 connector
- Clip-on mounting

An extensive range of connecting cables and adapter boxes lets you easily connect the OsiSense XG smart antennas to industrial communication networks.

Description

OsiSense XG 13.56 MHz compact smart antennas

XGCS smart antennas can read and write to the 13.56 MHz RFID tags that comply with standards ISO 15693 and ISO 14443 A and B.

Three models of OsiSense XG compact smart antennas are available:

- Flat form 40 compact smart antenna **XGCS4901201**:
 - Dimensions: 40 x 40 x 15 mm
 - Nominal sensing distance: 18–70 mm (0.71–2.76 in.), depending on the tag
- Flat form 80 compact smart antenna **XGCS8901201**:
 - Dimensions: 80 x 80 x 26 mm
 - Nominal sensing distance: 20–100 mm (0.79–3.94 in.), depending on the tag
- Wand-style compact smart antenna **XGW4F111**, with an adjustable head to locate tags in confined places



Compact smart antenna, flat form 40



Compact smart antenna, flat form 80



Electronic tags



Handheld terminal



Field expanders

OsiSense XG 13.56 MHz compact smart antennas (continued)**■ Functions integrated into the compact smart antennas**

OsiSense XG compact smart antennas integrate functions that simplify communication between the tags, the smart antennas, and the controller (such as a PLC or PC). These built-in functions are activated by standard requests, sent by the controller, for the reading or writing of words:

- **Firmware version:** The smart antenna is polled to read its version.
- **Reset:** The smart antenna is reinitialized and assumes its factory default configuration (network address at 1, transmission speed at 19,200 Bd, parameters deleted).
- **Init:** The smart antenna is reinitialized and operates as it would after being switched off, then on (address unchanged, transmission speed unchanged, parameters deleted)
- **Sleep mode:** Transmission of the smart antenna's electromagnetic field is activated only on receipt of a read or write instruction. This mode reduces the smart antenna's power consumption and suppresses interference when the smart antennas are close to each other.
- **Auto Read/Write:** In this mode, as soon as a tag enters the dialog zone, the smart antenna can automatically execute up to 10 read or write instructions (up to 128 write words and up to 126 read words).

OsiSense XG RFID electronic tags**■ XGHB electronic tags with EEPROM or FeRAM type memory ⁽¹⁾ offer the following advantages:**

- Fast access to data
- Wide range of memory capacities
- Secure access to contents
- Batteryless operation
- Positioning flexibility
- Protection suited to the environment

The nominal transmission distance is 18–100 mm (0.70–3.93 in.), depending on the model of the tag and the associated compact smart antenna.

RFID handheld terminal

The **XGST2020** RFID terminal, with embedded software and an external reader, is a powerful toolbox for conducting easy and efficient operations on RFID tags. The removable external smart antenna communicates with a wide range of ISO 14443 and ISO 15693 electronic tags. It also has a wide dialog range of up to 70 mm. The integrated battery offers long life—at least one full day of intensive use.

Field expanders

Field expanders are accessories designed for conveying/handling applications that adapt the shape of the dialog field of the OsiSense smart antenna XGCS4901201 using a connection-free induction link. Two standard models are available:

- The conveyor model **XGFEC540** detects ISO 15693 tags on a narrow strip covering the width of the conveyor (mounted between two rollers of the conveyor).
 - Dimensions: 400 x 23 x 50 mm
 - Nominal sensing distance: 30–90 mm (1.18–3.54 in.), depending on the associated tag
- The universal model **XGFEC2525** increases the detection area and the distance of ISO 15693 tags, which then permits higher passing speeds of the tags.
 - Dimensions: 250 x 250 x 10 mm
 - Nominal sensing distance: 26–150 mm (1.02–5.90 in.), depending on the associated tag
- Read/write compatibility with most 13.56 MHz ISO 15693 tags on the market.

(1) **EEPROM:** Electrically erasable, programmable read-only memory.
FeRAM: Ferroelectric read-only memory (non-volatile RAM).

OsiSense XG

Radio Frequency Identification System

13.56 MHz

Description (continued)

OsiSense XG connection boxes

Four types of quick connection boxes are available:

- Ethernet box **XGSZ33ETH** for an Ethernet Modbus TCP/IP network
- Ethernet/IP box **XGSZ33EIP** for an Ethernet/IP network
- Profibus-DP box **XGSZ33PDP** for a Profibus-DP network
- Tap-off box **TCSAMT31FP** for a Modbus or Uni-Telway communication bus

Ethernet box XGSZ33ETH

The OsiSense Ethernet box **XGSZ33ETH** connects XGCS smart antennas to an Ethernet network (Modbus TCP/IP protocol).

It provides PLC or PC access to the functions of the XGCS smart antennas:

- Reading and writing of tags
- Control and command
- Monitoring
- Diagnostics

The **XGSZ33ETH** Ethernet box is fitted with M12 connectors for the power supply, the Ethernet network, and 1–3 XGCS smart antennas (up to 8 smart antennas by daisy-chaining).

Ethernet/IP box XGSZ33EIP

The OsiSense Ethernet/IP box **XGSZ33EIP** connects XGCS smart antennas to the Ethernet/IP network.

It allows a PLC or PC to access the functions of the XGCS smart antennas:

- Reading and writing of tags
- Control and command
- Monitoring
- Diagnostics

The **XGSZ33EIP** box is fitted with M12 connectors for the power supply, the Ethernet/IP network, and 1–3 XGCS smart antennas (up to 15 smart antennas by daisy-chaining).

Profibus-DP box XGSZ33PDP

The OsiSense XG Profibus-DP box **XGSZ33PDP** connects XGCS smart antennas to a Profibus-DP network.

It provides PLC or PC access to the functions of the XGCS smart antennas:

- Reading and writing of tags
- Control and command
- Monitoring
- Diagnostics


The **XGSZ33PDP** box is fitted with M12 connectors for the power supply, the Profibus-DP network, and 1–3 XGCS smart antennas (up to 15 smart antennas by daisy-chaining).

Tap-off box TCSAMT31FP


The OsiSense XG tap-off box **TCSAMT31FP** connects XGCS smart antennas to a Modbus or Uni-Telway communication bus.

The **TCSAMT31FP** box is fitted with M12 connectors for the power supply, the Modbus communication bus, and 1–3 XGCS smart antennas (up to 15 smart antennas by daisy-chaining).


It includes a dust- and damp-proof metal enclosure.

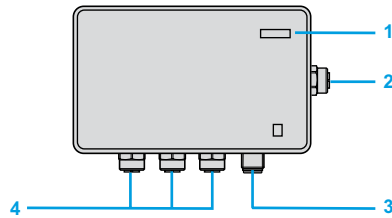


Ethernet box XGSZ33ETH

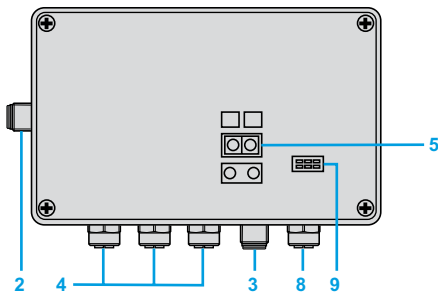

Ethernet/IP box XGSZ33EIP

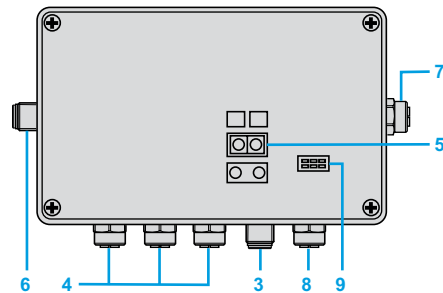

Profibus-DP box: XGSZ33PDP

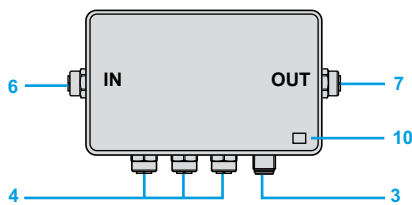


Connection box TCSAMT31FP

- 1 Power on and Ethernet signaling LEDs
- 2 1 Ethernet socket, M12 type, D coding
- 3 1 power supply socket, M12 type, 4-pin male
- 4 3 sockets, M12 type, female, A coding, for connecting XGCS smart antennas
- 5 Configuration of the network address
- 6 1 network input socket, M12 type, male
- 7 1 network output socket, M12 type, female
- 8 1 configuration port, M12 type, female
- 9 Network and connection box status LEDs
- 10 One green LED: Power on

Description (continued)

Mounting example for a Modbus™ network

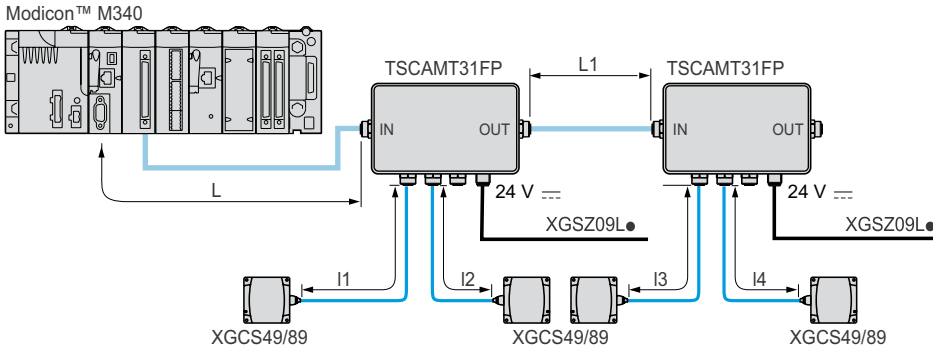


Maximum length of the bus
The maximum length of the bus (L + L1 + I4) depends on the speed of the network:
- 9,600 bd: 1000 m (3280.8 ft)
- 19,200 bd: 500 m (1640.4 ft)


Maximum length of the tap-offs:
I1, I2, and I3: 10 m (32.8 ft)

Example of a connection to a Schneider Electric PLC

Direct connection

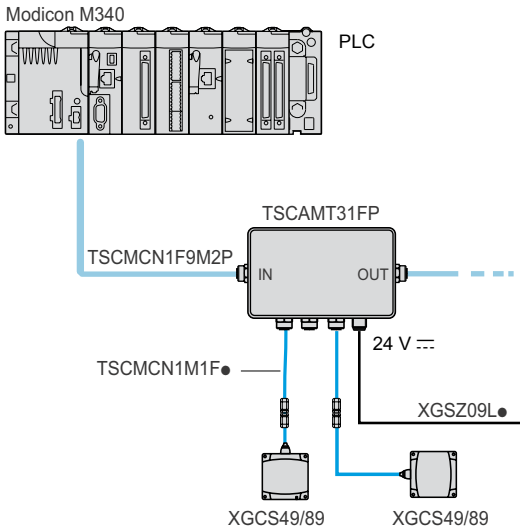

Connection via a TSXSACA62 junction box

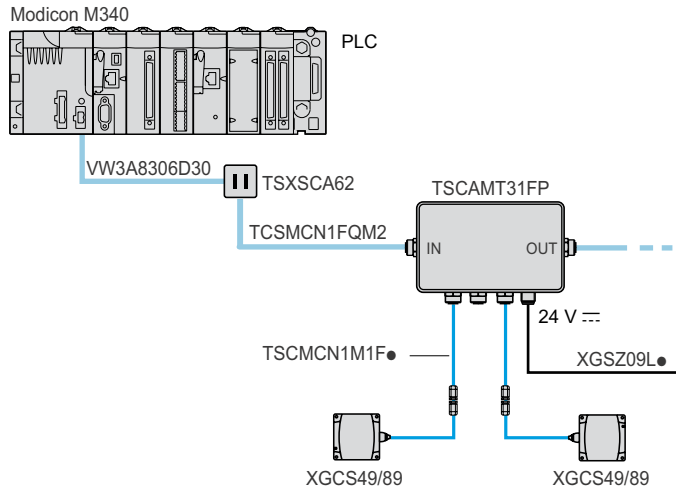


OsiSense XG

Radio Frequency Identification System


13.56 MHz

Example of a connection on an Ethernet network

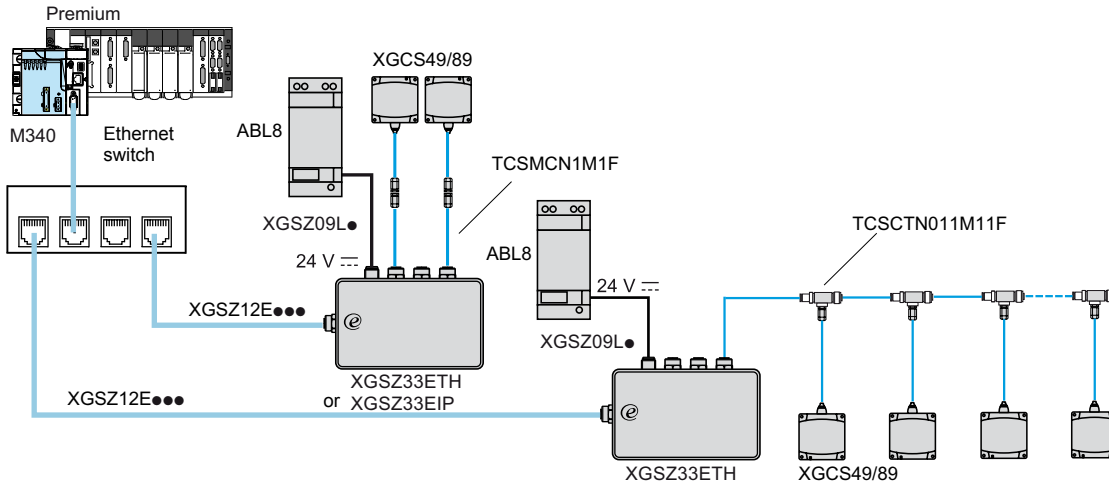


The number of smart antennas connected to each box can be increased by using M12 T-connectors (catalog number TCSCTN011M11F).
Note when using box XGSZ33ETH on Modbus/TCP: To maintain high-performance operation, connect a maximum of eight compact smart antennas. (The Ethernet box has eight communication ports that can be open simultaneously on TCP/IP.) In cases where the I/O scanning function is used (which requires an additional communication port), do not connect more than seven smart antennas. The total length of the side network for smart antennas XGCS49 and XGCS89 is limited to 160 m (525 ft).

Example of a mixed IP20 and IP67 connection on an Ethernet network

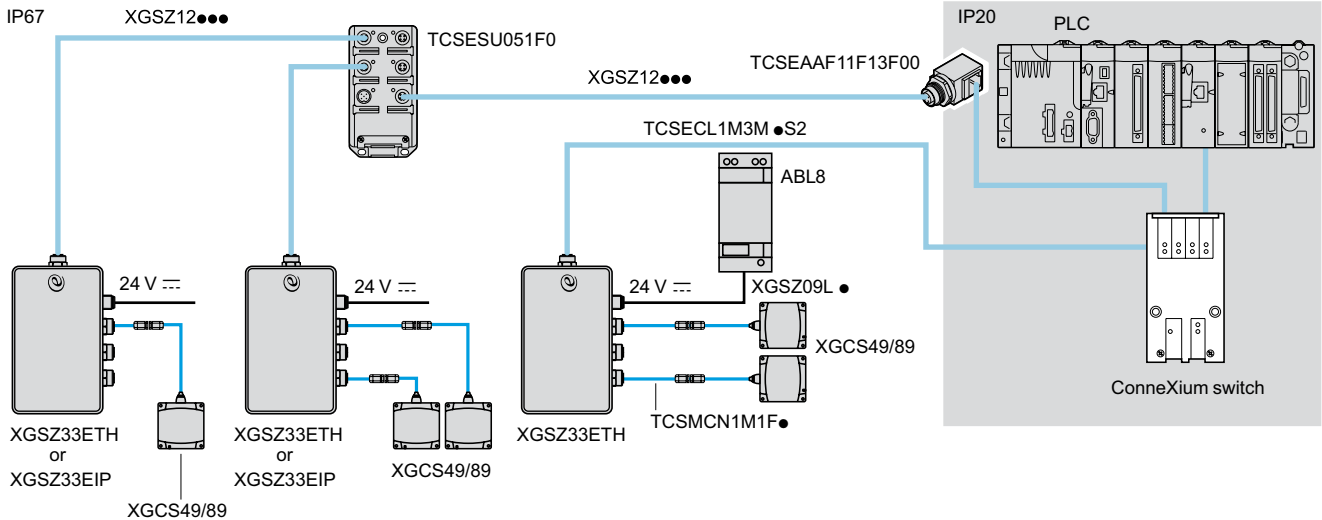

Example of a connection to a Magelis™ terminal

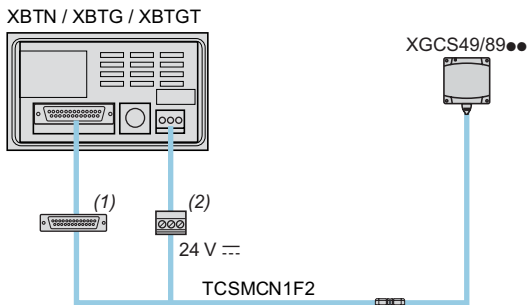


Cable TCSMCN1F2 connections


Diagram	Contact	Signal	Wire color
	1	Drain (Modbus-SHLD)	—
	2	24 V $\ddot{=}$	Red
	3	0 V/Modbus-GND	Black
	4	D0	White
	5	D1	Blue

(1) SUB-D 25-pin male connector.
 (2) Power supply connector included with the Magelis terminal.


Example of an architecture in a Profibus-DP network

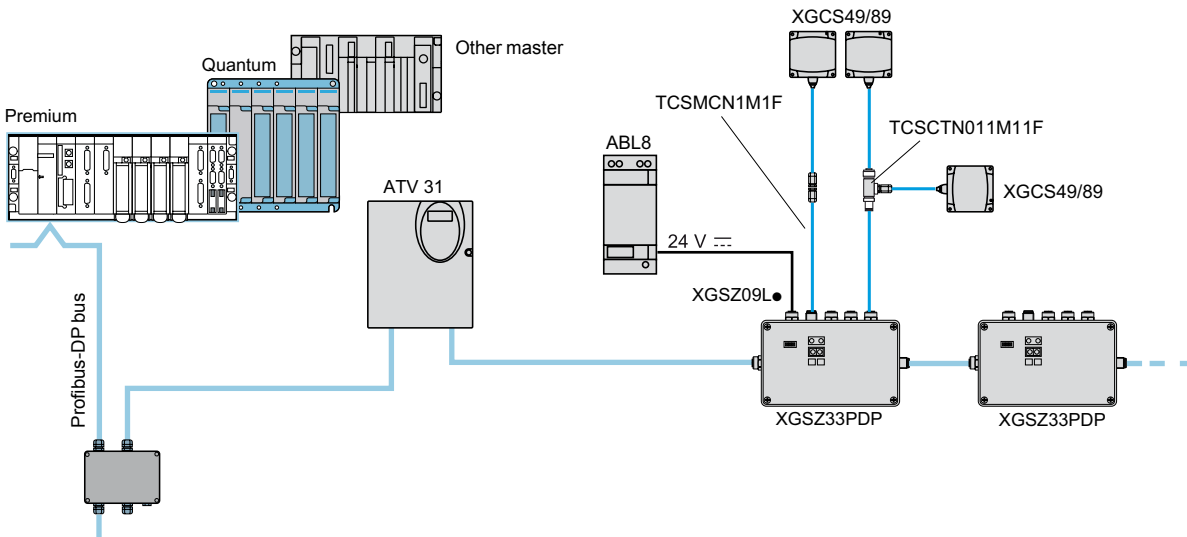

Example of a connection on a Twido™ PLC

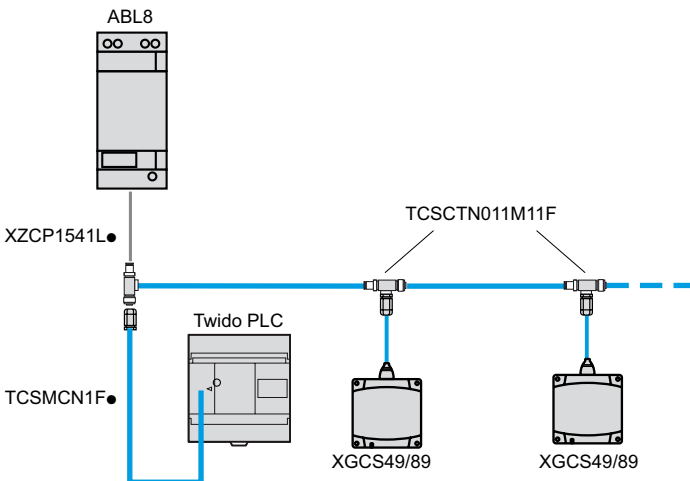

Example of a connection to a PC

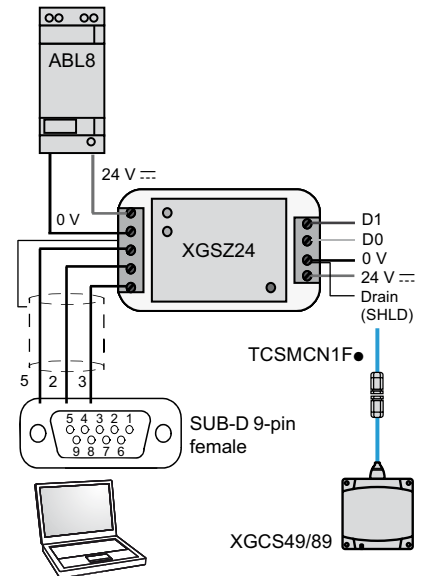

Power supply cable connections

XZCP1541L				Power supply ABL8	
Diagram	Contact	Signal	Wire color	Terminal block	
	1	NC	Brown	-	
	2	24 V AC	White	24 V AC	
	3	0 V GND	Blue	0 V GND	
	4	NC	Black	-	

TCSMCN1F cable connections

TCSMCN1F				Twido PLC (with serial interface adapter TWDNAC485T)	
Diagram	Contact	Signal	Wire color	Terminal block	Diagram
	1	Drain (SHLD)	-	-	
	2	24 V AC	Red	-	
	3	0 V GND	Black	SG	
	4	D0 V GND	White	B	
	5	D1	Blue	A	

Compact smart antennas connect directly to the Modbus port of a PLC. Up to 15 compact smart antennas can be linked to the RS-485 port using T-connectors. If the length of the network exceeds 100 m (328 ft), provide a line terminator, catalog number FTXCNTL12. This cabling system is specific to the OsiSense XG powered network. No other Modbus slave equipment can be connected to it.

OsiSense XG

Radio Frequency Identification System

13.56 MHz
Handheld terminal



Handheld terminal

Handheld terminal XGST2020

Functions

3 types of functions are embedded in the terminal:

- Direct operations on RFID tags
- Mapping (operator's predefined screens)
- Configuration

Direct operations on RFID tags

■ **Read/Write words.** Groups of up to 15 words can be read or written from a given starting address. Dates can be shown in several different formats: Decimal, Decimal signed, Binary, Decimal IP, Hexadecimal, ASCII.

■ **Tag copying** from one tag to another. The full tag memory or a partial area can be copied.

■ **Tag initialization.** The full tag memory or a defined area can be written with a value chosen by the operator.

■ **Tag Presence.** A cyclic test of the presence of the tag in front of the smart antenna connected to the terminal. An indicator light and a bargraph show the test results.

■ **Tag Identification.** The RFID protocol, the unique ID, and the user memory size of a tag in front of the smart antenna are detected by a scanner activated by the handheld terminal. The data is displayed on the screen.

Mappings

A mapping is a list of variables stored permanently in the memory of the handheld terminal for quick and easy access by the operators.

Each variable of a mapping is associated with a name. It can be shown in a format selected from numerous possibilities, both in read only or read/write mode. Creation, modification, and backup tools are embedded in the software of the handheld terminal.

Up to 256 mappings can be stored in the memory (each of them identified by a number and a name). Each mapping can contain up to 256 variables. Each variable is defined by its position in the memory of the tags, its size, and its type (word or byte) and its format on the screen.

The formats supported by the handheld terminal are:

- Decimal (1 word): 0 to 65535
- Decimal (1 byte): 0 to 255
- Decimal signed (1 byte): -128 to +127
- Decimal IP (2 Words): 0.0.0.0 to 255.255.255.255
- Hexadecimal (4 bytes): 0000 to FFFF
- Boolean bit (one bit):
- Binary (1 byte): 00000000 to 11111111
- List (1 byte): 0 to 15—a string, associated with each value of the byte, appears on the screen instead of the value of the byte.
- ASCII string: 1 to 21 characters
- Hex string: 2 to 30 hex characters (1 to 15 bytes)
- Date (8 bytes): YYYY/MM/DD
- Time (2 bytes): HH:MM

Data shown on a mapping can be stored in the memory of the terminal or written in an RFID tag.

A backup of each mapping or of all the mappings can be stored in a USB memory stick connected to the USB socket of the handheld terminal.



Main screen



Tag tools

OsiSense XG


Radio Frequency Identification System

13.56 MHz

Handheld terminal



Mapping management

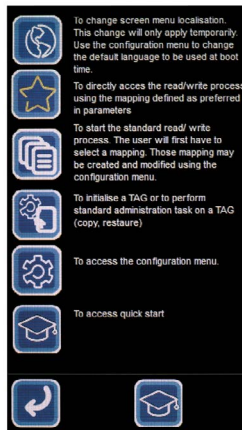

Online help

Handheld terminal XGST2020 (continued)

Functions (continued)

Configuration

■ Updating the terminal

This function is password protected and gives access to the following:

- Updating the smart antenna connected to the handheld terminal
- Changing the boot screen picture by loading a file from a USB memory stick
- Restoring the handheld terminal to its factory settings
- Changing the password

■ Terminal parameters

This function allows the modification of the following:

- Screen localization
- Shutdown delay
- Preferred mapping number
- IP and gateway addresses of the Ethernet port
- Back-lighting level

■ Mapping management

This function gives access to the following:

- Backup and restoration of all user mappings to and from a USB memory stick
- Export and import of one user mapping to and from a USB memory stick
- Creation, modification, copying, and erasure of the mappings. Each mapping is password protected.

Online help

Contextual online help is continuously accessible.

In addition, a tutorial on creating a mapping is accessible from the main screen.

Battery management

The handheld terminal is powered by a high capacity lithium-ion battery.

- The status of the battery is shown on the menu screen.
- A blue LED flashes when the battery needs recharging.
- An orange LED flashes while the battery is charging.

Accessories

Accessories for the handheld terminal

The handheld terminal is delivered in a plastic case with the following accessories:

- A USB charger **XGST2CH** with international plugs. It can be used in conjunction with cradle **XGST2SU** for easier connection to the handheld terminal.
- A lithium-ion high capacity battery **XGST2BA**
- A 2 GB USB flash memory stick **XGSZK1** for data transfer between handheld terminals or between a terminal and a PC. This memory stick also contains technical documents on the OsiSense XG RFID: catalogs, training materials, and examples.
- A stylus for the touchscreen
- A wrist strap for more secure handling of the terminal
- An Allen key

Antennas

Two versions of compact smart antennas are available:

- Compact antenna **XGCS4901201** for mounting on the back of the handheld terminal
- Wand antenna **XGW4F111** with a flexible head for remote operation on tags located in confined places (such as under pallets)

Docking cradle

The docking cradle **XGST2SU** is recommended for easier battery charging. It can be wall-mounted or desk-mounted.

The docking cradle is powered by the wall charger (catalog number **XGST2CH**).



XGW4F111



XGW4F111

OsiSense XG

Radio Frequency Identification System

13.56 MHz

Specifications of electronic tags

Tag type	XGHB411346	XGHB211345	XGHB221346	XGHB320345
				

Ambient air temperature	Operation	°C (°F)	-25 to +90 (-13 to +194)	-25 to +70 (-13 to +158)	-25 to +70 (-13 to +158)	-25 to +70 (-13 to +158)
	Storage	°C (°F)	-25 to +120 (4) (-13 to +248)	-40 to +85 (-40 to +185)	-40 to +85 (-40 to +185)	-40 to +85 (-40 to +185)
Degree of protection			IP68	IP68	IP68	IP65
Standard supported			ISO 15693	ISO 15693	ISO 15693	ISO 15693
Vibration resistance	Conforming to EN 60068.2.27		2 mm from 5–29.5 Hz / 7 gn from 29.5–150 Hz			
Shock resistance	Conforming to EN 60068.2.6		30 g / 11 ms			
	Conforming to EN 50102		Degree IK02			
Dimensions		mm	Ø40 x 8	M18 x 1 x 12	26 x 26 x 13	Ø30 x 3
Housing material			PBT	PBT	PBT	PC
Mounting method			Screw: two 4.2 mm holes	Screw: two 4.2 mm holes	Screw or clip	Screw
Memory capacity		bytes	64	256	256	112
Type of memory			EEPROM			
Type of operation			Read/Write			
Nominal sensing distance (Read/Write)	With smart antenna XGCS4901201	mm (in.)	40 (1.57)	18 (0.71)	40 (1.57)	48 (1.89)
	With smart antenna XGCS8901201	mm (in.)	63 (2.48)	20 (0.79)	55 (2.17)	65 (2.56)
	With smart antenna XGCS4901201 + field expander XGFEC540	mm (in.)	30–39 (1.18– 1.54)	—	—	42 (1.65)
	With smart antenna XGCS4901201 + field expander XGFEC2525	mm (in.)	35–46 (1.38– 1.81)	—	42 (1.65)	80 (3.15)
Number of read cycles			Unlimited			
Number of write cycles	Guaranteed minimum (per data bit, throughout the temperature range)		100,000			
	At 30°C		2.5 million typical value			
Read time		ms	12 + 0.825 x n (1)	12 + 0.825 x n (1)	12 + 0.825 x n (1)	12 + 0.825 x n (1)
Write time		ms	20 + 11.8 x n (1)	19 + 4.1 x n (1)	20 + 11.8 x n (1)	12 + 5.6 x n (1)
Maximum speed XGCS49●●	Read a serial number	m/s	1.8	1.8	2.8	3.1
	Read a word (2)	m/s	0.6	0.6	0.8	1.4
	Read or write 10 words (2)	m/s	0.2	0.2	0.3	0.7
Maximum speed XGCS89●●	Read a serial number	m/s	3	3.2	4.2	5.8
	Read a word (2)	m/s	0.9	1.1	2.6	2.7
	Read or write 10 words (2)	m/s	0.4	0.6	0.5	0.9
Data retention time			10 years			
Mounting on metal support			Yes	No	Yes (3)	No

(1) n = number of 16-bit words.

(2) With use of the Auto Read/Write function.

(3) Installation notes: see page 23.

(4) Storage temperature: up to 160 °C for 50 hours; up to 220 °C in cycles



XGHB90E340	XGHB444345	XGHB445345	XGHB320246	XGHB440245	XGHB440845	XGHB443245
-25 to +50 (-13 to +122)	-25 to +70 (-13 to +158)	-25 to +70 (-13 to +158)	-25 to +70 (-13 to +158)	-25 to +70 (-13 to +158)	-25 to +70 (-13 to +158)	-25 to +70 (-13 to +158)
-40 to +55 (-40 to +131)	-40 to +85 (-40 to +185)	-40 to +85 (-40 to +185)	-40 to +85 (-40 to +185)	-40 to +85 (-40 to +185)	-40 to +85 (-40 to +185)	-40 to +85 (-40 to +185)
IP65	IP68	IP68	IP65	IP68	IP68	IP68
ISO 15693	ISO 14443	ISO 14443	ISO 15693	ISO 15693	ISO 14443	ISO 14443
2 mm from 5–29.5 Hz / 7 gn from 29.5–150 Hz						
30 g / 11 ms			30 g / 11 ms			
Degree IK02			Degree IK02			
54 x 85.5 x 1	40 x 40 x 15	40 x 40 x 15	Ø30 x 3	40 x 40 x 15	40 x 40 x 15	40 x 40 x 15
PVC	PBT	PBT	PC	PBT	PBT	PBT
—	Screw or clip	Screw or clip	Screw	Screw or clip	Screw or clip	Screw or clip
256	3408	13632	2000	2000	8192	32768
EEPROM			FeRAM			
Read/Write			Read/Write			
70 (2.76)	33 (1.30)	30 (1.18)	45 (1.77)	45 (1.77)	25 (0.98)	25 (0.98)
100 (3.94)	48 (1.89)	40 (1.57)	65 (2.56)	65 (2.56)	39 (1.54)	39 (1.54)
90 (3.54)	—	—	50 (1.97)	50 (1.97)	—	—
150 (5.91)	—	—	40 (1.57)	40 (1.57)	—	—
Unlimited			10 ¹⁰			
100,000			10 ¹⁰			
2.5 million typical value			—			
12 + 0.825 x n (1)	9.25 + 0.375 x n (1)	16.25 + 0.38 x n (1)	7 + 2 x n (1)	7 + 2 x n (1)	6 + 0.25 x n (1)	6 + 0.25 x n (1)
20 + 11.8 x n (1)	13 + 0.8 x n (1)	20 + 0.8 x n (1)	7 + 2.4 x n (1)	7 + 2.4 x n (1)	6 + 0.25 x n (1)	6 + 0.25 x n (1)
5.3	3.1	2.6	2.1	2.1	2.3	2.3
1.6	1.4	1	1.5	1.5	1.8	1.8
0.6	1.2	0.9	0.6	0.6	1.7	1.7
7.1	4.8	4.2	3.5	3.5	3.8	3.8
4.0	2.7	2	2.5	2.5	3.0	3.0
0.8	1.8	1.5	1	1	2.6	2.6
10 years						
No	Yes (3)	Yes	No	Yes	Yes	Yes

OsiSense XG

Radio Frequency Identification System

13.56 MHz

Specifications of OsiSense XG compact smart antennas

Smart antenna type		XGCS8901201	XGCS4901201	XGW4F111
Certifications		UL, FCC part 15c, CE		
Conformity to standards		EN 301489-1, EN 301489-3, ETS 300330-1 and ETS 300330-2		
Ambient air temperature	For operation	°C	-25 to +70 (-13 to 158°F)	
	For storage	°C	-40 to +85 (-40 to 158°F)	
Degree of protection	Conforming to IEC 60529	IP65		
Vibration resistance	Conforming to EN 60068.2.27	2 mm from 5–29.5 Hz / 7 gn from 29.5–150 Hz		
Shock resistance	Conforming to EN 60068.2.6	30 g / 11 ms		
	Conforming to EN 50102	Degree IK02		
Resistance to interference	Conforming to IEC 61000	Resistance to electrostatic discharge, radiated electromagnetic fields, fast transients, electrical surges, conducted and induced interference, and network frequency magnetic fields.		
Dimensions, W x H x D	mm	Flat form: 80 x 80 x 26	Flat form: 40 x 40 x 15	290 x 40 x 25
RFID frequency	MHz	13.56		
Nominal sensing distance	mm (in.)	20–100 (0.79–3.94),	10–70 (0.39–2.76)	
Depending on the associated tag				
Type of associated tag		ISO 15693 and ISO 14443 standard tags. Automatic detection of the tag type.		
Compatible RFID microchip examples		Fujitsu (MB89R118), INSIDE (micropass) NXP (I-Code SL2, SL1, Ultralight, Std 1K/4K, Desfire), STM (CRIX4K) Texas (Tag-it HFI), µEM4135		
Nominal supply voltage		Vdc	24 PELV --- (protective extra-low voltage)	
Supply voltage limits (including ripple)		Vdc	19.2–29 ---	
Consumption		mA	< 60	
Serial link	Type	RS-485		
	Protocol	Modbus RTU or Uni-Telway		Modbus RTU
	Speed	Bauds		
Display		9,600–115,000 (automatic detection)		
Connections		1 dual color LED for the communication network: Modbus / Uni-Telway 1 dual color LED for RFID communication: presence of tag / smart antenna / tag dialog		
Tightening torque		Screws	N·m	< 3
				< 1
				—

Specifications of handheld terminal XGST2020

Certifications		CE		
Conformity to standards		IEC 61000-6-2, IEC61000-6-4		
Ambient air temperature	For operation	°C	0 to +45 (+32 to +113°F)	
	For storage	°C	-20 to +45 (-4 to +113°F)	
Materials	Housing	ABS		
Power supply	Internal	Battery, lithium-ion 3.7 V / 4,000 mAh. Full charge duration: 8 hours		
	Connector for charging	Mini USB		
Autonomy	Typical	> 8 hours (reading a tag each minute, brightness of the screen = standard)		
	Minimum	> 3 hours (continuous reading)		
Charging time	Maximum	< 8 hours (to fully charge a completely flat battery)		
Degree of protection	Conforming to IEC 60529	IP40		
	Conforming to IEC 62262	IK02 (touchscreen)		
	Drop test	Free fall on concrete ground: 1 m (39.37 in.)		
Connection to RFID reader serial link	Connector	M12 female socket		
	Type	RS485		
	Protocol	Modbus RTU - Master		
	Speed	Bauds	115,000	
External port		USB for memory stick (2 GB maximum)		
Operating system		Proprietary operating system		
Display		Resistive OLED touchscreen: 480 x 272 pixels, 16 M colors		
Signaling		Dual color (blue/orange) power status LED		

Specifications of accessories

Type of accessory		XGST2CH charger set	XGST2SU docking cradle for handheld terminal XGST2020
Certifications		CE	—
Input voltage		100–240 V ---, 50/60 Hz, 0.3 A maximum	5 V ---, 1 A maximum
Outputs		5 V ---, 1 A maximum x 2 outputs	5 V ---, 0.5 A maximum
Connections	Input	Interchangeable international plugs	Connected to charger XGST2CH
	Output	Mini USB cable, length 1 m (3.28 ft)	Spring contacts

OsiSense XG

Radio Frequency Identification System

13.56 MHz

Specifications of connection boxes				
Connection box type		Ethernet Modbus/TCP box XGSZ33ETH	Ethernet/IP box XGSZ33EIP	Profibus-DP box XGSZ33PDP
Certifications		UL	ODVA	Profibus
Conformity to standards		CE		
Ambient air temperature	Operation	°C (°F) 0 to +70 (+32 to +158)	0 to +55 (+32 to +131)	0 to +55 (+32 to +131)
	Storage	°C (°F) -40 to +85 (-40 to +185)	-25 to +85 (-13 to +185)	-25 to +85 (-13 to +185)
Relative humidity		RH 30–95% without condensation		
Degree of protection		IP65		
Supply voltage		V 24 PELV --- (limits 19.2–29 V). M12 connector, 4-pin male, A coding		
Consumption (connection box only)		W < 1	< 2.5	< 2.5
Smart antenna connection		M12 connector, 5-pin female, A coding. Total length of cables < 160 m (525 ft)		
Electromagnetic interference	Conforming to IEC61000	Level 3		
	Conforming to EN55022	Class B		
Protocol		Modbus TCP/IP	Ethernet/IP	Profibus-DP V1
LED display		- Ethernet network activity (RUN, green) - Collision detection (COL, red) - Diagnostics (STS, yellow) - Fault (Err, red) - Power on (green)	- Ethernet network activity (RUN, green) - Ethernet network activity (OFF, red) - Communication bus (Error, flashing red) - Modbus (RUN, green) - Gateway configuration (green)	- Profibus-DP network activity (RUN, green) - Profibus network activity (OFF, red) - Communication bus (Error, flashing red) - Modbus (RUN, green) - Gateway configuration (green)
Transparent Ready services	Class	A10		
	Standard Web server	IP configuration address		
	Standard communication services	Modbus messaging (read/write of words: 1–123 words per request).	Read/write of words (1–123 per request) via the periodic exchanges service.	Read/write of words (1–49 read per request) via the Profibus-DP periodic exchanges service. Profibus-DP V2 aperiodic exchanges not supported.
Connection	Physical interface	10 BASE-T/100 BASE-TX		
	Data rate	10/100 Mbps		
	Medium	Ethernet cable with M12 connection, D coding, catalog number XGSZ12E●● (see page 22)	Profibus cable with M12 connection, B coding	
Connection box type		Tap-off box TCSAMT31FP		
Certifications		UL		
Conformity to standards		CE		
Ambient air temperature	For operation	°C -25 to +55 (-13 to +131)		
	For storage	°C -40 to +85 (-40 to +185)		
Relative humidity		RH 30–95% without condensation		
Degree of protection		IP65		
Supply voltage		V 24 PELV --- (limits 19.2–29 V). M12 connector, 4-pin male, A coding		
Smart antenna connection		M12 connector, 5-pin female, A coding		
Electromagnetic interference	Conforming to IEC61000	Level 3		
	Conforming to EN55022	Class B		
LED display		Power on (green)		

OsiSense XG

Radio Frequency Identification System

13.56 MHz



XGCS4901201



XGW4F111



XGHB44●●45



XGHB90E340



XGHB221346




XGHB320345



XGHB411346



XGSZ05



XGSZCNF01

Compact smart antennas, 13.56 MHz

Description	Protocols	Dimensions mm	Catalog number	Weight kg (lb)
Compact smart antenna Flat form 80 (1) M12 male connector, unterminated	Modbus RTU and Uni-Telway	80 x 80 x 26	XGCS8901201	0.257 (0.57)
Compact smart antenna Flat form 40 (1) M12 male connector, unterminated	Modbus RTU and Uni-Telway	40 x 40 x 15	XGCS4901201	0.057 (0.13)
Wand antenna with flexible head and 1 m cable M12 male connector, unterminated	Modbus RTU	290 x 40 x 25	XGW4F111	0.228 (0.50)

Electronic tags (2)

Tag type	Nominal sensing distance according to smart antenna (mm)		Dimensions mm	Sold in lots of	Unit catalog number	Weight kg (lb)
	XGCS49●	XGCS89●				
Tag with EEPROM type memory						
Cylindrical 64 bytes	40	63	Ø40 x 8	1	XGHB411346	0.025 (0.055)
Cylindrical 256 bytes	18	20	M18 x 1 x 12	5	XGHB211345	0.020 (0.04)
Flat form 26 256 bytes	40	55	26 x 26 x 13	1	XGHB221346	0.025 (0.055)
Disc 112 bytes	48	65	Ø30 x 3	5	XGHB320345	0.005 (0.01)
ISO badge (3) 256 bytes	70	100	54 x 85.5 x 1	10	XGHB90E340	0.005 (0.01)
Flat form 40 3408 bytes	33	48	40 x 40 x 15	—	XGHB444345	0.031 (0.07)
Flat form 40 13632 bytes	30	40	40 x 40 x 15	—	XGHB445345	0.031 (0.07)
Tag with FeRAM type memory						
Disc 2000 bytes	45	65	Ø30 x 3	—	XGHB320246	0.005 (0.01)
Flat form 40 2000 bytes	45	65	40 x 40 x 15	—	XGHB440245	0.031 (0.07)
Flat form 40 8192 bytes	25	39	40 x 40 x 15	—	XGHB440845	0.031 (0.07)
Flat form 40 32768 bytes	25	39	40 x 40 x 15	—	XGHB443245	0.031 (0.07)

Accessories and documentation

Description	Unit catalog number	Weight kg (lb)
Key for screwing in/unscrewing Ø18 mm cylindrical tag XGHB211●● (Sold in lots of 5)	XGSZ05	0.011 (0.02)
Badge For the configuration of smart antenna addresses	XGSZCNF01	0.005 (0.01)
OsiSense XG compact smart antennas guide	DIA4ED3051001	0.130 (0.29)

(1) Configuration badge XGSZCNF01 included with smart antenna—installation guide ordered separately (catalog number DIA4ED3051001).

(2) Other versions (such as high temperature, adhesive, and flexible tags): consult the Customer Care Center.

(3) Customized versions on request.



TCSAMT31FP



XGFEC2525



XGFEC540



XGST2422



XGST2BA



XGST2CH

Connection boxes

Description	For use with	Supply voltage	Catalog number	Weight kg (lb)
Ethernet Modbus/TCP box	Compact smart antennas XGCS49● and XGCS89●	24 V $\overline{\text{---}}$	XGSZ33ETH	1.060 (2.34)
Ethernet/IP box (1)	Compact smart antennas XGCS49● and XGCS89●	24 V $\overline{\text{---}}$	XGSZ33EIP	1.060 (2.34)
Profibus-DP box (1)	Compact smart antennas XGCS49● and XGCS89●	24 V $\overline{\text{---}}$	XGSZ33PDP	1.060 (2.34)
Tap-off box, 3-channel Modbus and Uni-Telway	Compact smart antennas XGCS49● and XGCS89●	24 V $\overline{\text{---}}$	TCSAMT31FP	1.060 (2.34)

Field expanders

Description	Nominal sensing distance	For use with	Catalog number	Weight kg (lb)
Conveying type field expander Dimensions (mm) 400 x 23 x 50 (2)	30–90 mm depending on tag used (only ISO 15693)	Smart antenna XGCS4901201 Tags XGHB90E340 XGHB320345 XGHB221346	XGFEC540	0.640 (1.41)
Universal type field expander Dimensions (mm) 250 x 250 x 10 (2)	26–150 mm depending on tag used (only ISO 15693)	Smart antenna XGCS4901201 Tags XGHB90E340 XGHB320345	XGFEC2525	0.565 (1.25)

OsiSense XG handheld terminal

Description	Composition	Catalog number	Weight kg (lb)
Handheld terminal RFID set in a plastic case (3)	<ul style="list-style-type: none"> ■ 1 handheld terminal ■ 1 wrist strap ■ 1 lithium-ion battery ■ 1 charger battery pack ■ 1 stylus ■ 1 USB memory stick 	XGST2422	1.000 (2.20)

Note: RFID antenna ordered separately (see page 14).

Accessories

Description	Catalog number	Weight kg (lb)
Screen protection sheets Sold in lots of 5	XGST2FP	0.005 (0.01)
Styluses Sold in lots of 3	XGST2ST	0.006 (0.01)
Docking cradle	XGST2SU	0.086 (0.19)

Spare parts

Handheld terminal Terminal unit only (without battery, charger, or RFID reader)	XGST2020	0.295 (0.65)
Lithium-ion battery 3.7 V, 4000 mAh	XGST2BA	0.078 (0.17)
International charger pack	XGST2CH	0.160 (0.35)
USB memory stick 2 GB	XGSZK1	0.008 (0.02)

(1) Configuration file and installation guide to be downloaded from www.tesensors.com.

(2) For other dimensions consult the Customer Care Center.

(3) RFID reader ordered separately.



TCSMCN1FQM2



TCSMCN1F9M2P



TCCTN011M11F



TCSESU051F0



TCSEAAF11F13F00



ABL8MEM24003

Modbus network connection accessories

Description	Application	Length m	Catalog number	Weight kg (lb)
Modbus shielded connection cable, black, IP67 M12 connectors, male/female, A coding (1)	RS-485 connection between a compact smart antenna and a tap-off box	1	TCSMCN1M1F1	0.080 (0.18)
	or between 2 tap-off boxes, TCSAMT31FP	2	TCSMCN1M1F2	0.115 (0.25)
		5	TCSMCN1M1F5	0.270 (0.60)
		10	TCSMCN1M1F10	0.520 (1.15)
Modbus shielded pre-wired M12 connector, IP67, female/bare wires, A coding (1)	Connection between tap-off box TCSAMT31FP and a Modbus/Uni-Telway network (TSXSCA50 T-junction box)	2	TCSMCN1F2	0.115 (0.25)
		5	TCSMCN1F5	0.270 (0.60)
		10	TCSMCN1F10	0.520 (1.15)
Modbus shielded connecting cable, black, M12/SUBD-15, A coding	Connection between tap-off box TCSAMT31FP and a Modbus/Uni-Telway network (TSXSCA62 Y-junction box)	2	TCSMCN1FQM2	0.270 (0.60)
Modbus shielded connecting cable, black, M12/Mini-DIN 8-pin, A coding	Modbus connection between tap-off box TCSAMT31FP and a PLC (such as the Twido range)	2	TCSMCN1F9M2P	0.350 (0.77)
	Modbus SL serial link Shielded dual twisted pair RS-485 main cables	Modbus SL Serial link	100	TSXCSA100
		200	TSXCSA200	10.920 (24.07)
		500	TSXCSA500	30.000 (66.14)
Network Tee, M12 1M/2F 5-pin, A coding	RS485 network	—	TCCTN011M11F	0.035 (0.08)

Ethernet connection accessories

Ethernet connection accessories for IP67 switch

Description	End fittings	Length m	Catalog number	Weight kg (lb)
Copper connecting cables, straight	1 x IP67 M12 4-pin connector and 1 x RJ45 connector	1	XGSZ12E4501	—
		3	XGSZ12E4503	—
		10	XGSZ12E4510	—
	2 x IP67 M12 4-pin connectors	1	XGSZ12E1201	—
		3	XGSZ12E1203	—
		10	XGSZ12E1210	—
Copper connecting cables, elbowed	1 x IP67 M12 4-pin elbowed connector and 1 x RJ45 connector	3	XGSZ22E4503	—
		10	XGSZ22E4510	—
M12 Ethernet switch IP67, ConneXium (2)	—	—	TCSESU051F0	0.210 (0.46)
M12 female/RJ45 adapter	Ethernet connection	—	TCSEAAF11F13F00	—

Do-It-Yourself copper Ethernet cable and connectors

With the Do-It-Yourself ConneXium range, you can construct copper Ethernet connecting cables of the required length on-site. These cables are for connecting to the Ethernet 110/100 Mbps network. The maximum length of these connecting cables is 80 m. They are quick to assemble using only a knife and ordinary wire cutters—no special tool is required.

Description	Specifications	Length (m)	Catalog number	Weight kg (lb)
Copper Ethernet cable 2 x 24 AWG shielded twisted pairs	Conforms to current standards and approvals	300	TCSECN300R2	—
RJ45 connector	Conforms to EIA/TIA-568-D	—	TCSEK3MDS	—
M12 connector	Conforms to IEC 60176-2-101	—	TCSEK1MDRS	—

Power supplies (Schneider Electric)

Description	Output voltage	Nominal power	Nominal current	Catalog number	Weight kg (lb)
	V $\overline{---}$	W	A		
Regulated power supply 100/240 V	24	7	0.3	ABL8MEM24003	0.180 (0.40)
		30	1.2	ABL8MEM24012	0.520 (1.15)

(1) Holder for the identification legend included with the product.



(2) Other ConneXium connection accessories: refer to www.schneider-electric.com.



XGSZ24



XGSZ3P



XGSZ05

Connection accessories

Description	Application	Length m	Catalog number	Weight kg (lb)
Pre-wired M12 connector, 4-pin female supply, A coding (1)	24 V $\overline{\text{---}}$ supply to connection boxes XGSZ33ETH and TCSAMT31FP	2	XGSZ09L2	0.115 (0.25)
		5	XGSZ09L5	0.270 (0.60)
		10	XGSZ09L10	0.520 (1.15)
M12 connector, 5-pin female, A coding	—	—	XZCC12FDB50R	0.050 (0.11)
M12 connector, 5-pin male, A coding	—	—	XZCC12MDB50R	0.050 (0.11)
Supply connector, screw terminals, M12 straight, A coding	—	—	XZCC12FDM40B	0.020 (0.04)
Protective cap (Sold in lots of 10)	M12 female connector	—	ASI67FACC1	0.013 (0.03)
Network terminator, M12 male, 120 Ω	—	—	FTXCNTL12	0.010 (0.02)
Line adapter, RS-232C/RS-485, without modem signals Supply: 18–30 V $\overline{\text{---}}$, Consumption: 20 mA Maximum transmission speed: 19,200 bd Mounting on 35 mm $\overline{\text{---}}$ rail			XGSZ24	—

Mounting accessories

Description	For use with	Catalog number	Weight kg (lb)
Clip-on 90° mounting bracket	Flat form 40 smart antenna: XGCS4901201	XSZBC90	0.060 (0.13)
	Flat form 40 tags: XGHB44●345		
	Tags XGHB221346	XSZBE90	0.060 (0.13)
Clip-on mounting plate	Flat form 40 smart antenna: XGCS4901201	XSZBC00	0.025 (0.055)
	Flat form 40 tags: XGHB44●345		
	Tags XGHB221346	XSZBE00	0.025 (0.055)
Mounting plate	For connection boxes TCSAMT31FP and XGSZ33ETH	XGSZ3P	0.195 (0.43)
3D mounting system (2)	Field expander XGFEC2525		
	Support for M12 rod	XUZ2003	0.220 (0.49)
	M12 rod	XUZ2001	0.050 (0.11)
	Ball-joint mounting bracket	XUX2003	0.220 (0.49)

Additional accessories

Description	Sold in lots of	Catalog number	Weight kg (lb)
Key for screwing in and unscrewing Ø 18 mm cylindrical tags	5	XGSZ05	0.011 (0.02)
Identification legend for 23 x 4 mm connecting cables	200	XGSZ08MKW	0.056 (0.12)


(1) Holder for the identification legend included with the product.

(2) To obtain a 3D mounting system, order the following: rod support XUZ2003,
M12 rod XUZ2001, and ball-joint mounting bracket XUX2003.

Compact smart antennas

XGCS4901201

XGCS8901201

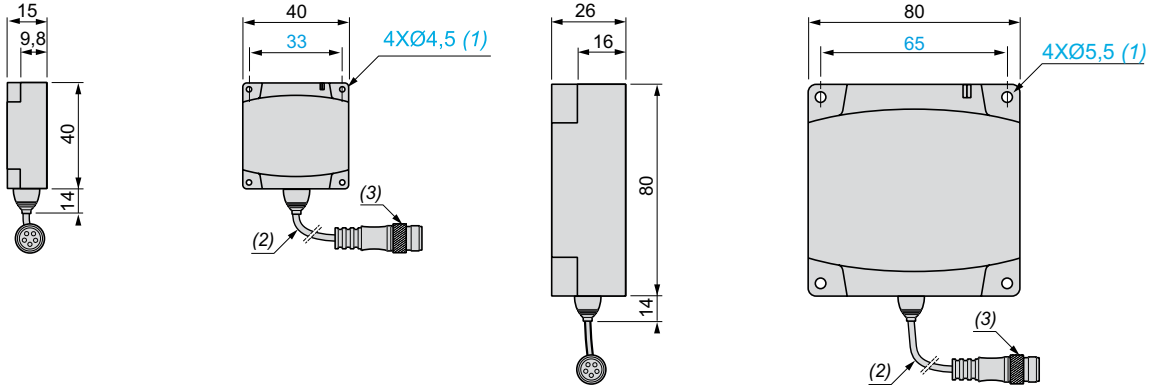

(1) For CHC type screws.

(2) Shielded cable (20 cm long).

(3) M12 connector, 5-pin male, A coding.

Updatable code electronic tags


Square format tags

XGHB44●●

XGHB221346

Rectangular format tags

XGHB90E340

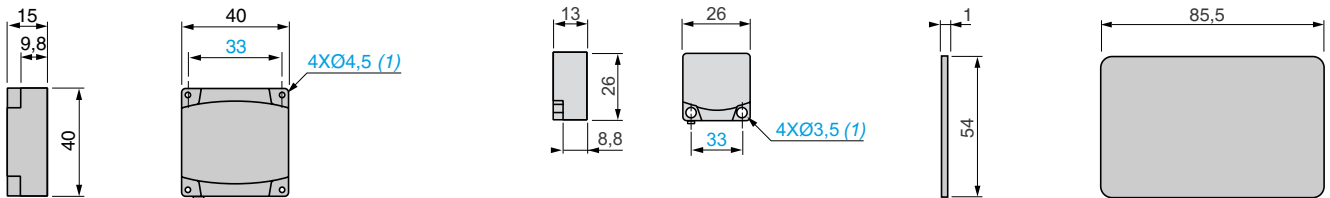


(1) For CHC type screws.

Cylindrical format tags

XGHB32●●

XGHB411346


XGHB123345

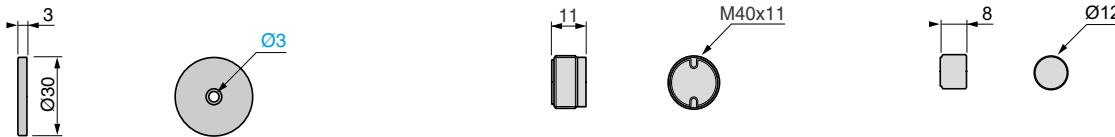

Connection boxes (1)


Connection box TCSAMT31FP

Box XGSZ33ETH (Ethernet)

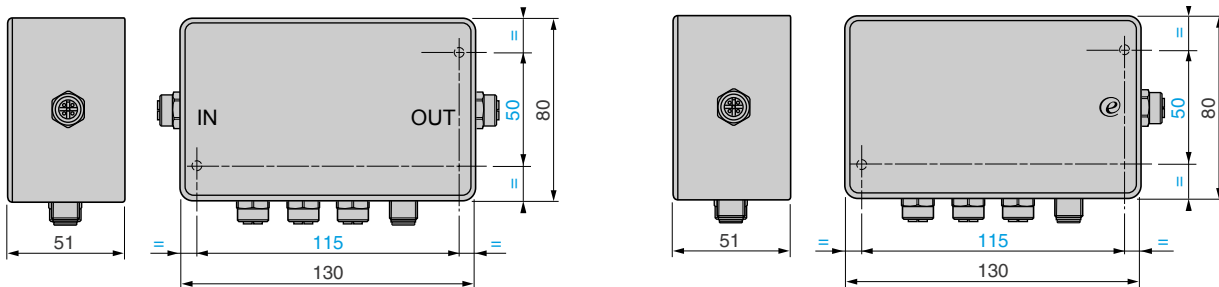

Boxes XGSZ33PDP (Profibus-DP) and XGSZ33EIP (Ethernet/IP)

Mounting plate XGSZ3P

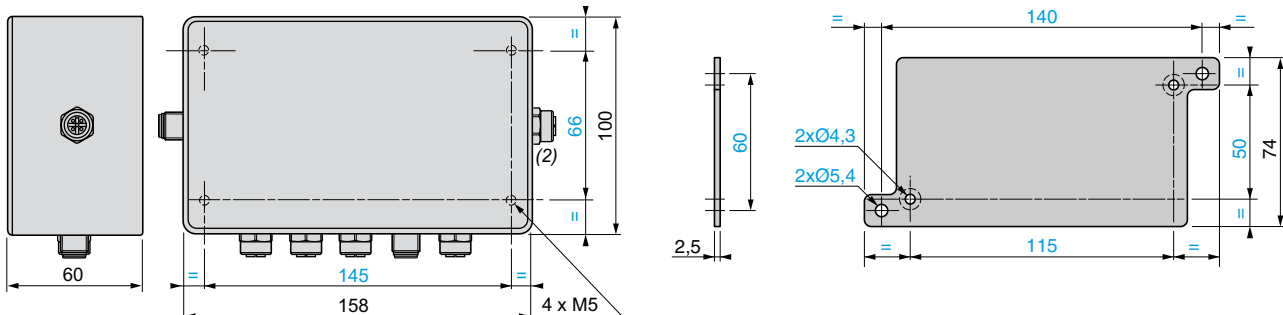


(1) Allow a 110 mm clearance zone for connecting the cables.

(2) This connector is only present on the Profibus-DP box.


Handheld RFID terminal

XGST2020 (30 mm deep)

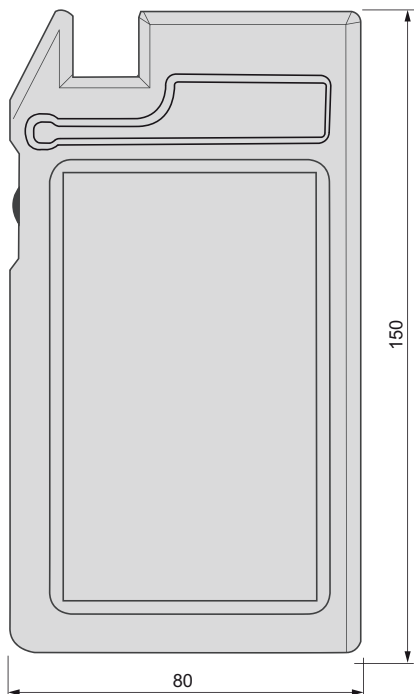


Field expanders

Conveying type XGFEC540

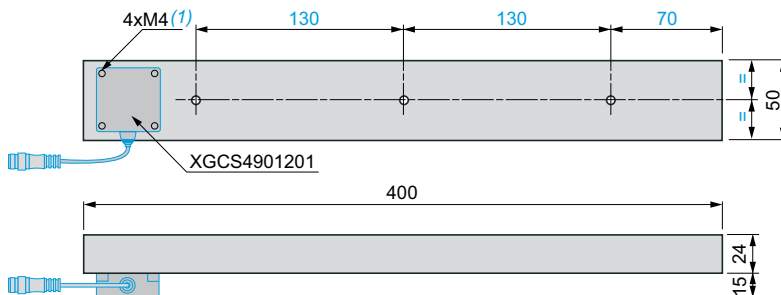

(1) 4 x M4 screws (included).


Universal type XGFEC2525

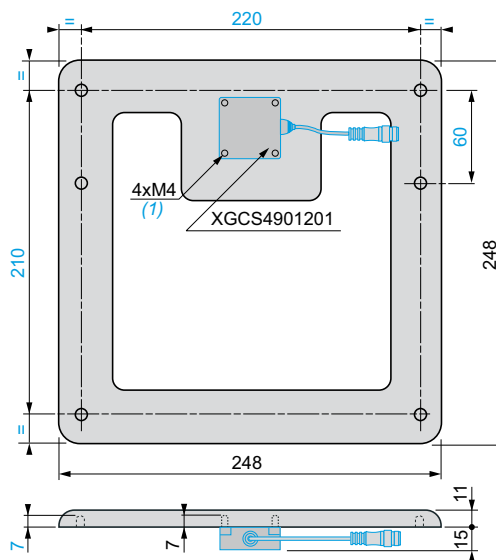

(1) 4 x M4 screws (included).

Mounting brackets


For smart antennas XGCS49●● and tags XGHB44●●
XSZBC90

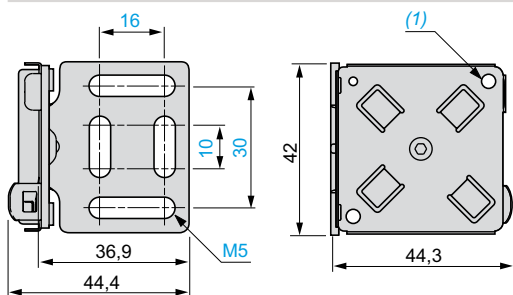

(1) 4 screws, M4 x 14 (included).

Mounting plates


For smart antennas XGCS49●● and tags XGHB44●●
XSZBC00

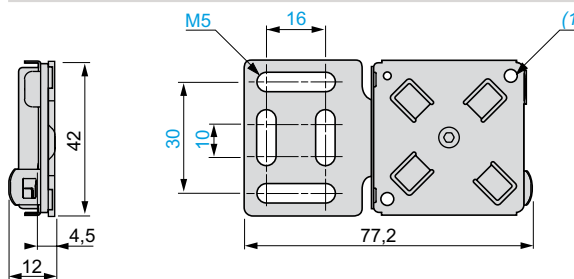

(1) 4 screws, M4 x 14 (included).


For tags XGHB221346

XSZBE90

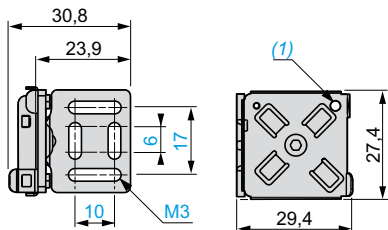

(1) 2 screws, M3 x 12 (included).


XSZBE00

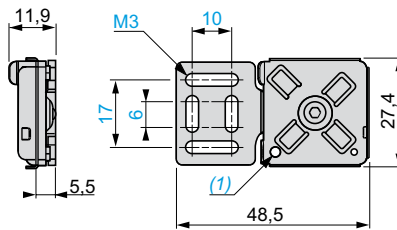

(1) 2 screws, M3 x 12 (included).

Modbus connections

Smart antennas XGCS●901201

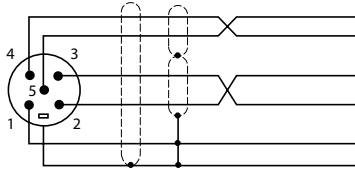

Pin no.	Modbus smart antenna signal
1	Drain (Modbus-SHLD)
2	+24 V $\overline{\text{---}}$
3	0 V/Modbus-GND
4	D0
5	D1
Connector casing	Shielding

Connection box TCSAMT31FP

Socket to smart antenna cabling

Pin no.	Signal
1	– Drain (Modbus-SHLD)
2	+24 V $\overline{\text{---}}$
3	0 V/Modbus-GND
4	D0
5	D1

Socket to power supply cabling

Pin no.	Signal
1	+24 V $\overline{\text{---}}$
2	+24 V $\overline{\text{---}}$
3	0 V $\overline{\text{---}}$
4	0 V $\overline{\text{---}}$

Socket to another connection box cabling

Pin no.	Signal
1	Drain (Modbus-SHLD)
2	–
3	0 V/Modbus-GND
4	D0
5	D1

Socket to industrial PLC cabling

Pin no.	Signal
1	Drain (Modbus-SHLD)
2	–
3	0 V/Modbus-GND
4	D0
5	D1

Cable connections

TCSMCN1F●

Pin no.	Signal
1	– Drain (Modbus-SHLD)
2	Red +24 V $\overline{\text{---}}$
3	Black 0 V/Modbus-GND
4	White D0
5	Blue D1
Connector casing	Shielding

XGSZ09L


Pin no.	Signal
1	Red +24 V $\overline{\text{---}}$
2	NC
3	Black 0 V $\overline{\text{---}}$
4	NC

Ethernet and Modbus/TCP connection

Ethernet box XGSZ33ETH


Socket to smart antenna cabling

Pin no.	Signal
1	Ground
2	+24 V $\overline{\text{---}}$
3	0 V
4	D0
5	D1




Socket to power supply cabling

Pin no.	Signal
1	+24 V $\overline{\text{---}}$
2	+24 V $\overline{\text{---}}$
3	0 V $\overline{\text{---}}$
4	0 V $\overline{\text{---}}$




Cable TCSECL1M3M●●S2

M12	Signal	Signal	RJ45
1	TD +	TD +	1
3	TD -	TD -	2
2	RD +	RD +	3
4	RD -	RD -	6

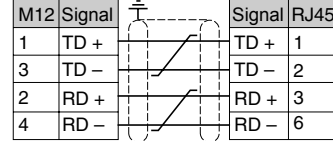

Socket to Ethernet connection




Ethernet/IP connection

Ethernet/IP box XGSZ33EIP


Socket to smart antenna cabling

Pin no.	Signal
1	Ground
2	+24 V $\overline{\text{---}}$
3	0 V
4	D0
5	D1




Socket to power supply cabling

Pin no.	Signal
1	+24 V $\overline{\text{---}}$
2	+24 V $\overline{\text{---}}$
3	0 V $\overline{\text{---}}$
4	0 V $\overline{\text{---}}$



Cable TCSECL1M3M●●S2

M12	Signal	Signal	RJ45
1	TD +	TD +	1
3	TD -	TD -	2
2	RD +	RD +	3
4	RD -	RD -	6

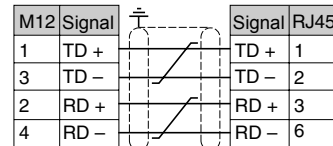


Profibus-DP connection

Profibus-DP box XGSZ33PDP


Socket to smart antenna cabling

Pin no.	Signal
1	Ground
2	+24 V $\overline{\text{---}}$
3	0 V
4	D0
5	D1




Socket to power supply cabling

Pin no.	Signal
1	+24 V $\overline{\text{---}}$
2	+24 V $\overline{\text{---}}$
3	0 V
4	0 V




Profibus-DP network connections

Input	Output	Pin no.	Signal	Description
		1	VP	Line terminator polarization
		2	RxD/TxD-N	Receive/transmit data (-) (red wire)
		3	DGND	GND Profibus
		4	RxD/TxD-P	Receive/transmit data (+) (green wire)
		5	Shielding	Shielding or ground
		Connector casing	Shielding	Shielding or ground




Dialog zones of compact smart antennas

XGCS4901201

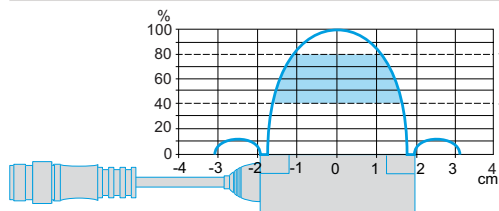



XGCS8901201

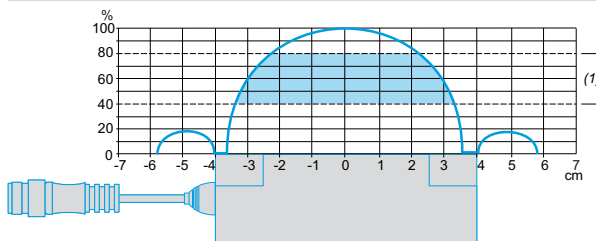



(1) Recommended crossing zone: between 0.4 and 0.8 Sn.

Dialog zones for field expanders


XGFEC540 + XGHB90E340

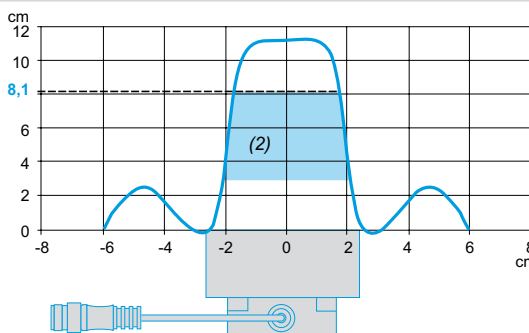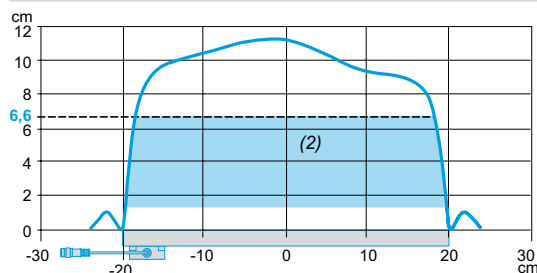


XGFEC540 + XGHB320345

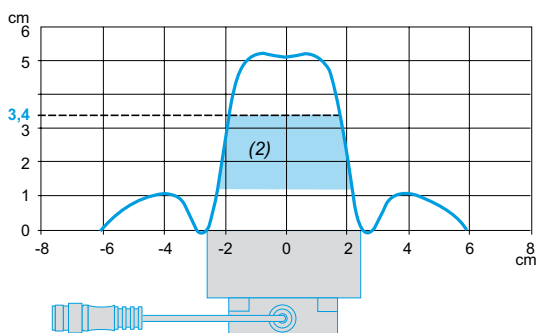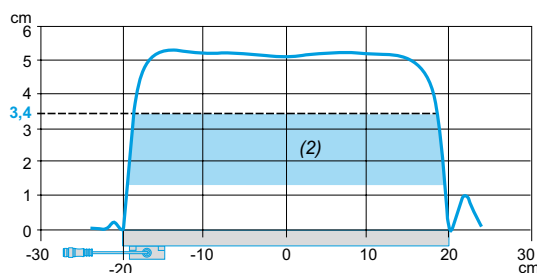

XGFEC2525 + tag XGHB90E340

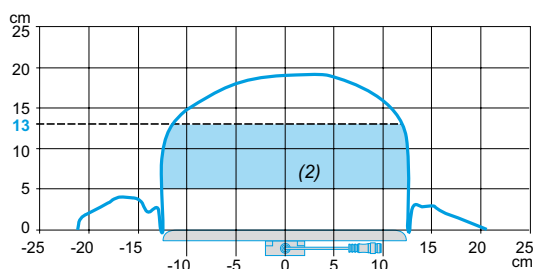


XGFEC2525 + tag XGHB320345

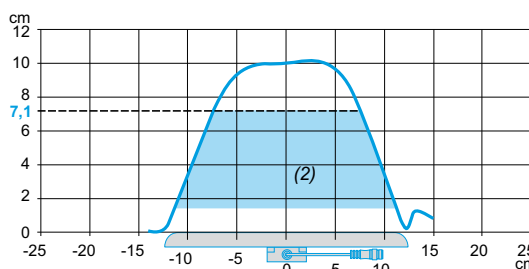

(2) Recommended working zone.

Angular positioning between smart antenna and tag

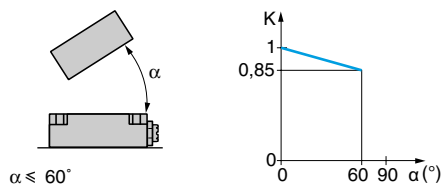


K = correction coefficient to be applied to the nominal sensing distance (S_n). Read distance = $S_n \times K$.

Minimum mounting distances between system components

Distance between smart antennas


Minimum distance between 2 identical smart antennas according to their positioning and the type of tag used, mm (in.)

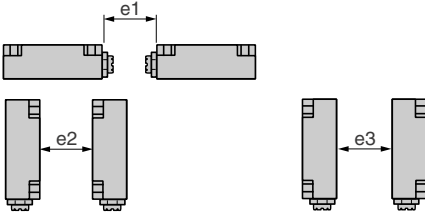

Tag	XGC 40 x 40 format			XGC 80 x 80 format		
	e1	e2	e3	e1	e2	e3
XGHB90E340	310 (12.2)	550 (21.7)	120 (4.7)	430 (16.9)	750 (29.5)	280 (11.0)
XGHB221346	200 (7.9)	320 (12.6)	100 (3.9)	280 (11.0)	530 (20.9)	260 (10.2)
XGHB320345	140 (5.5)	360 (14.2)	110 (4.3)	310 (12.2)	540 (21.3)	240 (9.4)
XGHB44345	90 (3.5)	190 (7.5)	30 (1.2)	310 (12.2)	400 (15.7)	160 (6.3)
XGHB123345	210 (8.3)	180 (7.1)	60 (2.4)	200 (7.9)	370 (14.6)	170 (6.7)

Distance between field expanders


Minimum distance between 2 identical field expanders according to their positioning and the type of tag used, mm (in.)

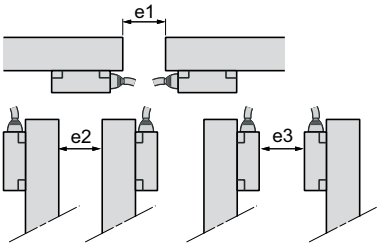

Tag	Field expander XGFEC540			Field expander XGFEC2525		
	e1	e2	e3	e1	e2	e3
XGHB90E340	195 (7.7)	285 (11.2)	195 (7.7)	570 (22.4)	890 (35.0)	960 (37.8)
XGHB320345	420 (16.5)	540 (21.3)	450 (17.7)	720 (28.3)	1275 (50.2)	1200 (47.2)

Distance between tags

Minimum distance between 2 identical tags according to their positioning and the type of smart antenna used, mm (in.)

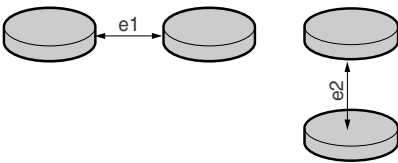

Tag	XGC 40 x 40 format		XGC 80 x 80 format	
	e1	e2	e1	e2
XGHB90E340	35 (1.4)	60 (2.4)	110 (4.3)	140 (5.5)
XGHB221346	50 (2.0)	10 (0.4)	120 (4.7)	50 (2.0)
XGHB320345	70 (2.8)	50 (2.0)	190 (7.5)	60 (2.4)
XGHB444345	20 (0.8)	10 (0.4)	70 (2.8)	40 (1.6)
XGHB445345	10 (0.4)	10 (0.4)	60 (2.4)	10 (0.4)
XGHB440845	30 (1.2)	10 (0.4)	60 (2.4)	10 (0.4)
XGHB443245	30 (1.2)	10 (0.4)	60 (2.4)	10 (0.4)

Minimum permissible mounting distances in a metal structure

Smart antennas and tags



Smart antennas XGCS49/S89 and tags XGHB221346/ XGHB44345

Tag XGHB320345

No metal parts within 15 mm (0.6 in.) of the tag.

Tags XGHB90E340, XGHB211345

No metal parts within 25 mm (1.0 in.) of the tag.

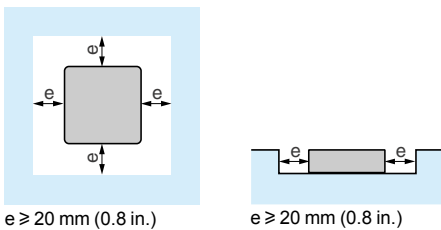

e ≥ 15 mm (0.6 in.)


(1) Tightening torque ≤ 1 N.m (8.9 lb-in)
(2) Insulating material.

Tags	Nominal sensing distance Sn, mm (in.)	
	XGCS49	XGCS89
XGHB90E340	70 (2.8)	100 (3.9)
XGHB221346	40 (1.6)	55 (2.2)
XGHB320345	48 (1.89)	65 (2.6)
XGHB411346	30–39 (1.18–1.54)	35–46 (1.38–1.81)
XGHB444345	33 (1.30)	48 (1.89)
XGHB445345	30 (1.18)	40 (1.6)
XGHB440245	45 (1.77)	65 (2.6)
XGHB440845	25 (1.0)	39 (1.54)
XGHB443245	25 (1.0)	39 (1.54)

Reduced sensing distance with presence of metal, mm (in.)	
XGCS49	XGCS89
58 (2.3)	80 (3.1)
30 (1.18)	33 (1.30)
45 (1.77)	56 (2.2)
24–31 (0.9–1.2)	28–37 (1.1–1.5)
28 (1.1)	34 (1.3)
24 (0.9)	28 (1.1)
30 (1.18)	45 (1.77)
20 (0.8)	28 (1.1)
20 (0.8)	28 (1.1)

Field expanders

	e, mm (in.)	h, mm (in.)
XGFEC540	15 (0.6)	30 (1.18)
XGFEC2525	0	75 (2.8)

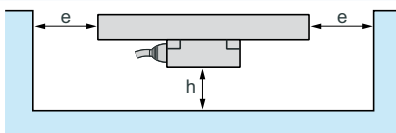

A		XGST2422	21
ABL8MEM24003	22	XGSZ3P	23
ABL8MEM24012	22	XGSZ05	20
ASI67FACC1	23	XGSZ05	23
		XGSZ08MKW	23
D		XGSZ09L2	23
DIA4ED3051001	20	XGSZ09L5	23
		XGSZ09L10	23
F		XGSZ12E1201	22
FTXCNTL12	23	XGSZ12E1203	22
		XGSZ12E1210	22
T		XGSZ12E1225	22
TCSAMT31FP	21	XGSZ12E4501	22
TCSCNT011M11F	22	XGSZ12E4503	22
TCSEAAF11F13F00	22	XGSZ12E4510	22
TCSECN300R2	22	XGSZ22E4503	22
TCSEK1MDRS	22	XGSZ22E4510	22
TCSEK3MDS	22	XGSZ24	23
TCSESU051F0	22	XGSZ33EIP	21
TCSMCN1F2	22	XGSZ33ETH	21
TCSMCN1F5	22	XGSZ33PDP	21
TCSMCN1F9M2P	22	XGSZCNF01	20
TCSMCN1F10	22	XGSZK1	21
TCSMCN1FQM2	22	XGW4F111	20
TCSMCN1M1F1	22	XSZBC00	23
TCSMCN1M1F2	22	XSZBC90	23
TCSMCN1M1F5	22	XSZBE00	23
TCSMCN1M1F10	22	XSZBE90	23
TSXCSA100	22	XUZ2001	23
TSXCSA200	22	XUZ2003	23
TSXCSA500	22	XUZ2003	23
		XUZ2003	23
X		XZCC12FDB50R	23
XGCS4901201	20	XZCC12FDM40B	23
XGCS8901201	20	XZCC12MDB50R	23
XGFEC540	21		
XGFEC2525	21		
XGHB90E340	20		
XGHB123345	20		
XGHB211345	20		
XGHB221346	20		
XGHB320246	20		
XGHB320345	20		
XGHB440245	20		
XGHB440845	20		
XGHB443245	20		
XGHB444345	20		
XGHB445345	20		
XGST2BA	21		
XGST2CH	21		
XGST2FP	21		
XGST2ST	21		
XGST2SU	21		
XGST2020	21		

Schneider Electric USA, Inc.
1875 Founders Drive
Dayton, Ohio 45420
(800) 435-2121
www.tesensors.us

Schneider Electric Canada, Inc.
5985 McLaughlin Road
Mississauga, Ontario L5R 1B8
(800) 435-2121
www.tesensors.ca

Electrical equipment should be installed, operated, serviced, and maintained only by qualified personnel. No responsibility is assumed by Schneider Electric for any consequences arising out of the use of this material.

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

© 2010–2014 **Schneider Electric. All Rights Reserved.** Schneider Electric, Telemecanique, OsiSense, Modicon, Modbus, Magelis, and Twido are trademarks owned by Schneider Electric Industries SAS or its affiliated companies. All other trademarks are the property of their respective owners.

9006CT0902R06/13 January 2014. Replaces 9006CT0902R12/11 March 2012.