


RSPower and RSPower Plus

Put Power Monitor Data at your Fingertips

Benefits:

- Remotely organize and configure your Powermonitors
- Store configuration in one place
- View real-time Powermonitor data
- View log and historical data remotely
- View harmonic, transient, sag/swell, and waveform data
- OPC server

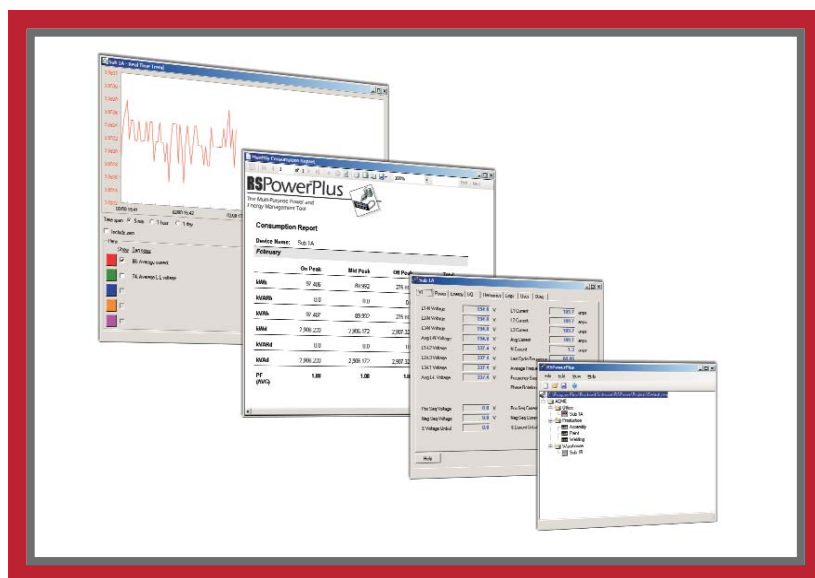

Solve your power monitoring and energy management problems using Rockwell Automation power monitoring hardware teamed with RSPower™ software from Rockwell Software®.

RSPower is a .NET/Windows®-based software program that configures and displays data from all Rockwell Automation power monitors. RSPower is a complete tool that allows you to save power monitor data to disk, print data, harmonics and waveforms, and manage your power monitor configurations.

Install RSPower as a stand-alone package or as an extension of RSVIEW32™ HMI software and begin working with your power monitoring equipment from your desktop.

RSPower and RSPowerPlus Key Features

Quick and easy configuration, monitoring and integration of power information

- Organize your Allen-Bradley® Powermonitors into a graphical tree to represent your specific configuration or view the power monitors in a sorted list
- Upload and download your Powermonitor configuration parameters from your PC
- Save your entire site configuration as well as the individual data from each monitor
- Continuous access to all power data from your PC
- Display your data in pop-up views of real-time data
- Display historical data stored within the power monitor
- RSPower contains an OPC server to simultaneously provide power monitor data to many external software packages
- Flexible communications via RSLinx® to communicate with Powermonitors

RSPowerPlus Key Features

Pre-configured Billing and Consumption Reports

- Run pre-configured monthly or yearly electrical consumption reports for each individual Powermonitor utilizing the TOU function in the Powermonitor 1000 and 3000 family of products
- Run pre-configured monthly or yearly billing reports by manually entering consumption and demand rates utilizing the TOU function in the Powermonitor 1000 and 3000 family of products

Pre-Configured real-time and historical Trending Tools

- Display real-time trending for up to 5 parameters simultaneously
- Display historical trending for data directly from the trend log of each meter
- User defined limits for monitoring of electrical parameters (i.e. demand monitoring)

Advanced presentation of data including Power Quality parameters

- Pop-up windows are available to view, print, and save harmonic spectral data, waveforms, event logs, min/max logs, and snapshot logs
- Displays the harmonic content of your electric signal on your PC screen in both spreadsheet and bar graph formats
- Check power line condition before, during, or after a disturbance

RSPowerPlus Benefits

- Real-time monitoring of electrical parameters
- Generate consumption and demand reports for a plant, department or process
- Provides billing reports, based on real energy consumption and demand, for a plant, department or process
- Trending of real-time and historical electrical parameters
- Track power quality problems and pinpoint causes of disturbances that could yield big paybacks

System Hardware requirements

- Pentium 4 or P4 - compatible microprocessor
- 256 MB of RAM
- 100 MB of available hard disk space
- CD-ROM/DVD-ROM drive
- 3.5-inch, 1.44 MB disk drive
- Windows 2000, Windows 2000 Server, Windows XP, or Windows Server 2003
- Microsoft .NET Framework 2.0
- Adobe Acrobat Reader
- RSLinx Classic 2.51

RSPower Hardware Requirements

- Rockwell Bulletin 1400 Powermonitor, 1403 Powermonitor II, 1404 Powermonitor 3000, 1408 Powermonitor 1000
- Appropriate communications interface to the Powermonitor
- Ethernet, ControlNet™, DeviceNet™ or Remote I/O connection between Powermonitor and PC*

RSPower

Catalog Number	Description
9307-RSP32LXWENE	RSPower Works Bundled with Communication Drivers
9307-RSP32LXRENE	RSPower Runtime Bundled with Communication Drivers
9307-RSP32WENE	RSPower Works without Communication Drivers
9307-RSP32RENE	RSPower Runtime without Communication Drivers

RSPowerPlus

Catalog Number	Description
9307-RSPPLXWENE	RSPowerPlus Works Bundled with Communication Drivers
9307-RSPPLXRENE	RSPowerPlus Runtime Bundled with Communication Drivers
9307-RSPPWENE	RSPowerPlus Works without Communication Drivers
9307-RSPPRENE	RSPowerPlus Runtime without Communication Drivers

RSPower to RSPowerPlus Upgrade

Catalog Number	Description
9307-RSPPWU1	RSPower Works to RSPowerPlus Works upgrade
9307-RSPPRU1	RSPower Runtime to RSPowerPlus Runtime upgrade

ALSO FROM ROCKWELL SOFTWARE

RSEnergyMetrix™ – a Web server-based HMI for profiling energy loads, allocating energy costs, and verifying utility bills.

RSView32 – a complete HMI for monitoring and controlling your automation machines and processes.

RSLinx – a comprehensive communications driver suite for all Allen-Bradley networks.

Allen-Bradley, Rockwell Software, RSEnergyMetrix, RSLinx, RSPower and RSView32 are trademarks of Rockwell Automation.

Trademarks not belonging to Rockwell Automation are property of their respective companies.

www.rockwellautomation.com

Power, Control and Information Solutions Headquarters

Americas: Rockwell Automation, 1201 South Second Street, Milwaukee, WI 53204-2496 USA, Tel: (1) 414.382.2000, Fax: (1) 414.382.4444

Europe/Middle East/Africa: Rockwell Automation, Vorstlaan/Boulevard du Souverain 36, 1170 Brussels, Belgium, Tel: (32) 2 663 0600, Fax: (32) 2 663 0640

Asia Pacific: Rockwell Automation, Level 14, Core F, Cyberport 3, 100 Cyberport Road, Hong Kong, Tel: (852) 2887 4788, Fax: (852) 2508 1846